

Daloc S81 (Y81) Steel hatch



Common areas of use are cellars, attics and industrial premises.

Reference	Clear opening dimensions	Outer dimensions frame	Weight
Single door			
S81 4 x 4	337 x 337	370 x 370	7
S81 4 x 6	337 x 537	370 x 570	8
S81 5 x 5	437 x 437	470 x 470	9
S81 6 x 6	537 x 537	570 x 570	13
S81 7 x 7	637 x 637	670 x 670	15
S81 7 x 8	637 x 737	670 x 770	18
S81 7 x 15	637 x 1437	670 x 1470	31
S81 7 x 15	637 x 1437	670 x 1470	31
S81 8 x 8	737 x 737	770 x 770	19
S81 8 x 10	737 x 937	770 x 970	24
S81 9 x 9	837 x 837	870 x 870	25
S81 10 x 10	937 x 937	970 x 970	30
S81 10 x 13	937 x 1237	970 x 1270	37

Double leaf hatches and other sizes and hatches for external use are manufactured like fire doors Daloc S10 or S30 with all round frame.

*At 90 degree opening door loss 46 mm from the clear opening.

CLASSIFICATIONS

Daloc S81 is tested by RISE Research Institutes of Sweden AB and certified by RISE Certifiering. It is manufactured under the control of RISE.

Fire rating: A60.

Corrosion class: C1-C2 according to EN ISO 12944-2

DOOR LEAF

Design: The hatch leaf is 48 mm thick with a burred edge.

Material: 1 mm galvanized steel panels and mineral wool insulation.

Surface treatment: The hatch is supplied painted with NCS S 0502-Y.

FRAME

Design: Steel frame with fixed architraves on the opening face. Surface treatment same as leaves.



Installation: The frame is supplied assembled for screw mounting in the wall.

STANDARD FITTINGS

Lock case Assa 565, A=48 mm, B=24 mm (from opening face). Fixed pin hinge in galvanized version. A/B measurements apply only to Assa Connect and Assa Module locks, as regards to other locks please contact Daloc.

We reserve the right to make modifications to the designs.

DETAIL SKETCHES

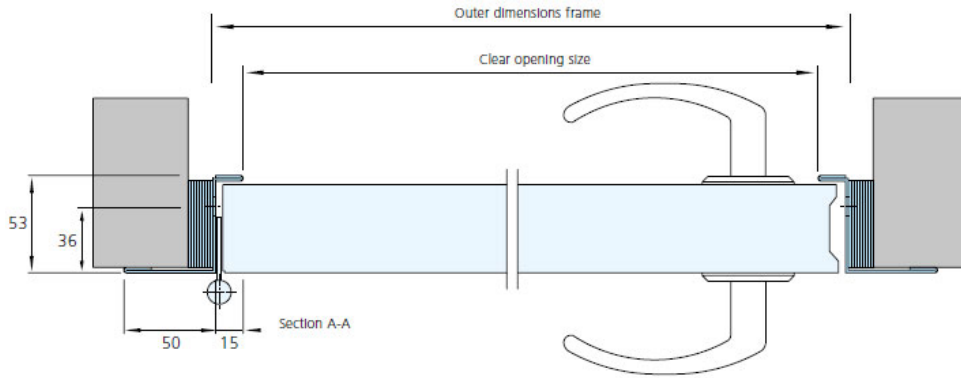

PICTURES



Lock case Assa 565.



Burr edge.



Galvanized hinges.