

Daloc T10/48 Solid door



Daloc T10 is a solid, unrated interior timber door for areas where there are no special requirements for sound or fire resistance ratings. Wood doors in the Daloc range are equipped with protective edging around the whole door leaf, which both protects and makes it easier to keep them clean and are suitable for use in public areas such as offices, schools, hospitals, surgeries and sports halls.

Reference	Clear opening dimensions	Outer dimensions frame	Weight
Single door T10 7 x 21 T10 8 x 21 T10 9 x 21 T10 10 x 21 T10 11 x 21 T10 12 x 21 T10 13 x 21 Double door	600 x 2025 700 x 2025 800 x 2025 900 x 2025 1000 x 2025 1100 x 2025 1200 x 2025	690 x 2093 790 x 2093 890 x 2093 990 x 2093 1090 x 2093 1190 x 2093 1290 x 2093	42 47 52 57 62 67 72
T10 15 x 21 T10 18 x 21	1400 x 2025 1700 x 2025	1490 x 2093 1790 x 2093	96

Other module sizes and special sizes are available on request.

* At 90 degree opening door loss 47 mm (wood frame), 35 mm (steel frame), 53 mm (inset crush protection) from the clear opening.

CLASSIFICATIONS

Unrated

DOOR LEAF

Design: The door leaf is 48 mm thick and has a solid chipboard core with a tough wood surround. The design makes the door leaf durable and rigid as well as creating a pleasant, damped closing sound. Our selection of tough 38 x 66 mm wood surrounds also gives strong screwed joints for mounting hinges and door closers for example, which contributes to a longer service life. **Material:** Core is manufactured from solid chipboard with surrounding wood frame.

Surface treatment: Laminate doors are clad with 4 mm wood fibre sheet with a surface coating of 0.7 mm thickness laminate sheet from our standard range. Ready painted doors are clad in 5 mm wood fibre sheet and supplied in white as standard. Veneered doors are clad in 4 mm wood fibre sheet with a surface coating of 0.6 mm knife cut veneer of sorted A-quality, available in oak, beech or birch. Other laminate surfaces or NCS colours are available on request.

EDGING

Laminate doors: Supplied as standard with protective edging of 3 mm beech patterned ABS-plastic on four edges. Alternatively, the doors are supplied with ABS-edging in other designs and colours or with solid wood edging.

Painted doors: Supplied with painted protective melamine edging on all edges.

Veneered doors: Supplied with veneered edging on all four edges in the same type of wood as the surface of the door leaf.



FRAME

Design: White painted pine frame 45x92 mm but available to order in frame dimensions 45x68, 45x98, 45x118, 45x122 and 45x145 mm or frame with choice of frame depths 68-250 mm.

Other: Other types of wood, NCS colours and surface treatments are available on request. Where a steel frame is required the door is supplied with Daloc's steel frame type 01, 02 or 04-09.

THRESHOLD

The frame is supplied as standard without a threshold but is available to order with types G, H, K, V or L threshold bar and type B threshold plate, plastic threshold or drop seal threshold.

STANDARD FITTINGS

Lock case Assa 310, A=48 mm, B=23 mm from opening face to centre of lock case. Galvanized fixed pin hinges and adjustable striking plate. A/B measurements apply only to Assa Connect and Assa Module locks, as regards to other locks please contact Daloc.

OPTIONAL COMPONENTS

Can be supplied with Daloc Linea pattern, factory fitted frame sleeves, vision panel, steel frame, steel threshold, kick plate, frame protection, crush protection etc.


DOUBLE LEAF DOORS


The door leaves and frame are manufactured in the same way as the single leaf door. The active leaf has an external astragal strip fitted on the opening face side and the passive leaf has two recessed flush bolts of the lever arm type as standard.


We reserve the right to make modifications to the designs.



DETAIL SKETCHES

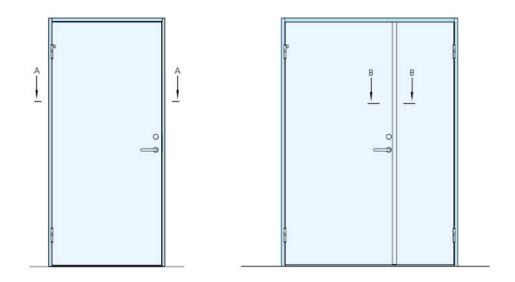

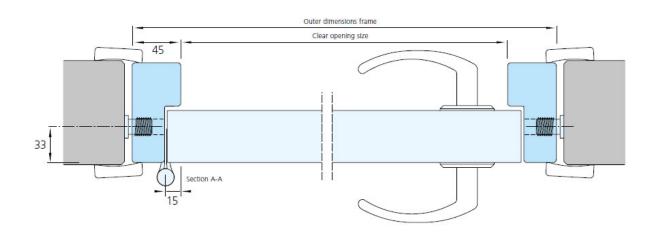

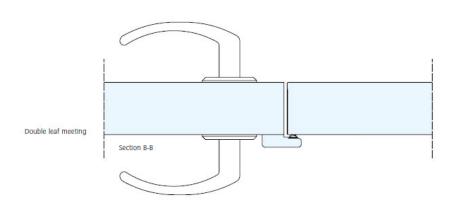



PICTURES



Protective edging around the whole door leaf that both protects and makes it easier to keep clean.



Lock case Assa 310.



Striking plate for Assa 310 lock case.





