

## Daloc T16/48 Surface-mounted sliding door



Reference	Clear opening dimensions	Outer dimensions frame	Weight
<b>Single door</b>			
T16 8 x 21	700 x 2048	790 x 2093	51
T16 9 x 21	800 x 2048	890 x 2093	58
T16 10 x 21	900 x 2048	990 x 2093	63
T16 11 x 21	1000 x 2048	1090 x 2093	69
<b>Double door</b>			
T16 15 x 21	1400 x 2048	1490 x 2093	92
T16 18 x 21	1700 x 2048	1790 x 2093	109
Other module sizes and special sizes are available on request.			

Is the space confined? Or does the door only open from time to time? Then Daloc T16, our solid sliding door, is a good choice. It is intended for use as an interior door in areas where there is insufficient space for a traditional door. Wood doors in the Daloc range are equipped with protective edging around the whole door leaf, which both protects and makes it easier to keep clean and are suitable for use in schools, hospitals and surgeries.

### CLASSIFICATIONS

Unrated

### DOOR LEAF

**Design:** The door leaf is 48 mm thick and has a solid chipboard core with a tough wood surround. The design makes the door leaf durable and rigid as well as creating a pleasant closing feeling. Our selection of tough 38x66 mm wood surrounds also gives a strong screwed joints for carrier ironmongery etc which contributes to a longer service life.

**Material:** Core is manufactured from solid chipboard with surrounding wood frame.

**Surface treatment:** Laminate doors are clad with 4 mm wood fibre sheet with a surface coating of 0.7 mm thickness laminate sheet from our standard range.

Ready painted doors are clad in 5 mm wood fibre sheet and supplied in white as standard. Veneered doors are clad in 4 mm wood fibre sheet with a surface coating of 0.6 mm knife cut veneer of sorted A-quality, available in oak, beech or birch. Other laminate surfaces or NCS colours are available on request.

### EDGING

**Laminate doors:** Supplied as standard with protective edging of 3 mm beech patterned ABS-plastic on four edges. Alternatively, the doors are supplied with ABS-edging in other designs and colours or with solid wood edging.

**Painted doors:** Supplied with painted protective melamine edging on all edges.

**Veneered doors:** Supplied with veneered edging on all four edges in the same type of wood as the surface of the door leaf.

## FRAME

---

**Design:** White painted pine frame 45x92 mm but can be ordered with frame depths 118, 122 or 145 mm or frame with choice of frame depths 68–250 mm.

**Other:** Other types of wood, NCS colours and surface treatments are available on request.

## THRESHOLD

---

The sliding doors are delivered without thresholds as standard but can also be ordered with a thresh-old plate of oak or a plastic threshold.

## STANDARD FITTINGS

---

Sliding doors are supplied without locks with complete kit of the suspension fittings. The suspension fittings have bearings and run in rails. The door leaf is guided by a routed groove in the bottom. Exterior sliding doors of the T16 type are delivered as standard with a cornice painted the same colour as the frame. The door leaf is supplied with an inset pull handle.

## OPTIONAL COMPONENTS

---

Can be supplied with Daloc Linea pattern, factory fitted frame sleeves, lock, vision panel, synchronising fittings etc.




## DOUBLE LEAF DOORS

---

The door leaves and frame are manufactured in the same way as the single leaf door. The door meeting for sliding doors does not have an astragal, each door leaf operates separately.

*We reserve the right to make modifications to the designs.*

**DETAIL SKETCHES**

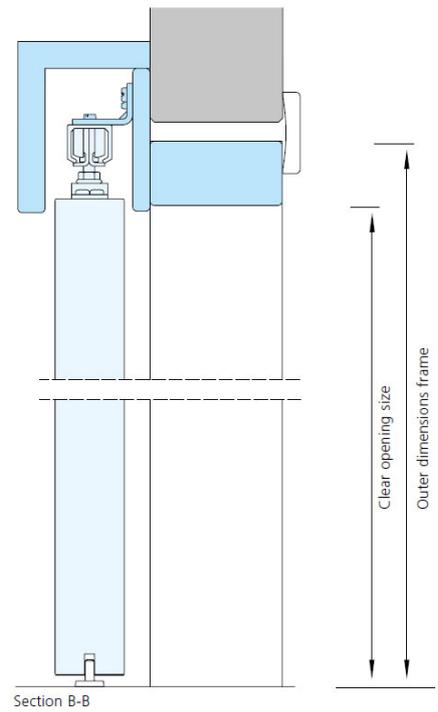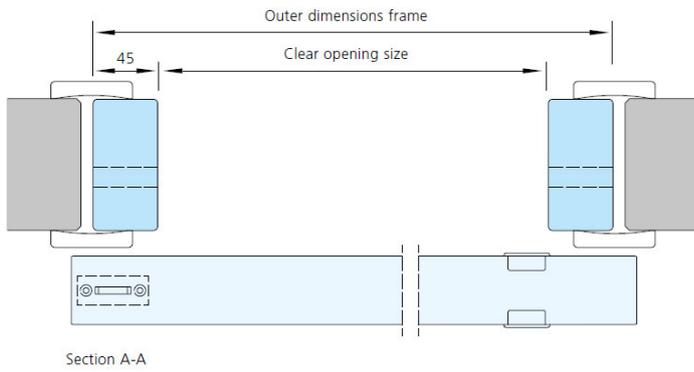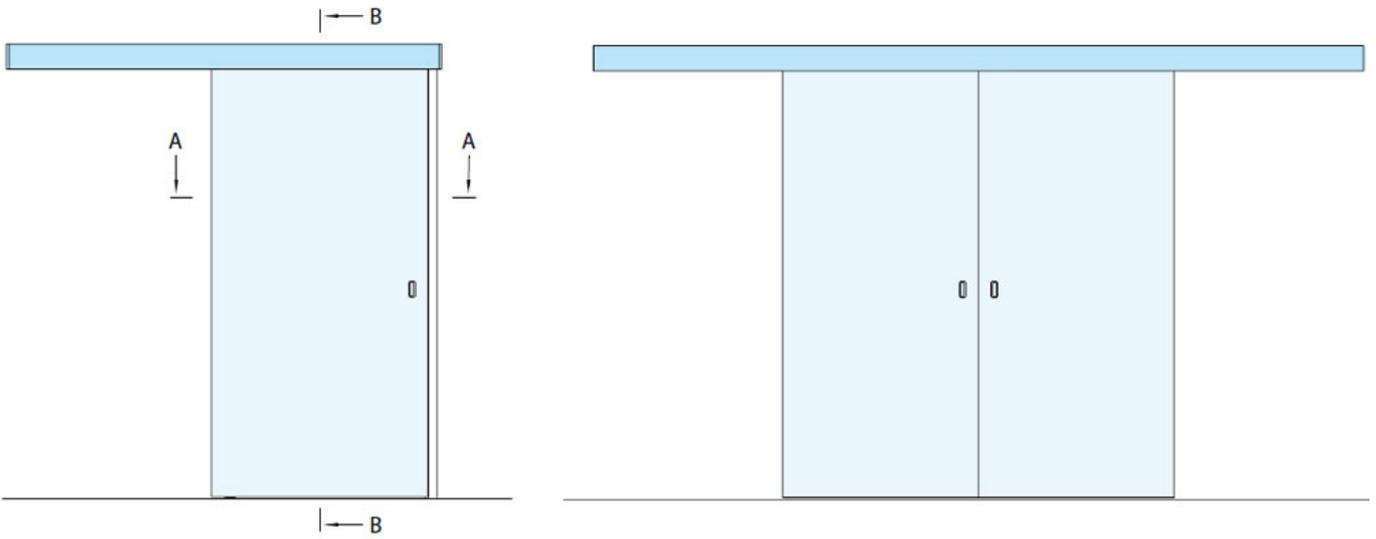

**PICTURES**

---



Bearing carriers.



Painted cornice.



Inset pull handle.