

## Daloc T25/48 Solid door



Reference	Clear opening dimensions	Outer dimensions frame	Weight
<b>Single door</b>			
T25 7 x 21	600 x 2025	690 x 2093	42
T25 8 x 21	700 x 2025	790 x 2093	47
T25 9 x 21	800 x 2025	890 x 2093	52
T25 10 x 21	900 x 2025	990 x 2093	57
T25 11 x 21	1000 x 2025	1090 x 2093	62
T25 12 x 21	1100 x 2025	1190 x 2093	67
T25 13 x 21	1200 x 2025	1290 x 2093	72
<b>Double door</b>			
T25 15 x 21	1400 x 2025	1490 x 2093	82
T25 18 x 21	1700 x 2025	1790 x 2093	96

Daloc T25 is a solid door suitable for use in areas when the requirements for sound reduction are high while the door must also be fire resistant. Wood doors in the Daloc range are equipped with protective edging around the whole door leaf, which both protects and makes it easier to keep clean and are suitable for use as interior doors in schools, offices, hospitals and surgeries.

Other module sizes and special sizes are available on request.

\*At 90 degree opening door loss 47 mm (wood frame), 35 mm (steel frame), 53 mm (inset crush protection) from the clear opening.

### CLASSIFICATIONS

The door type is tested by RISE Research Institutes of Sweden AB and certified by RISE Certifying. It is manufactured under the control of RISE.

**Fire rating:** EI30.

**Sound reduction:** Rw 38 dB.

**Brandgastätthet: Fire gas seal:** Option EN 13501-2 klass S<sub>a</sub> och S<sub>200</sub>

### DOOR LEAF

**Design:** The door leaf is 48 mm thick and has a solid chipboard core with a tough wood surround. The design makes the door leaf durable and rigid as well as creating a pleasant, damped closing sound. The rigidity also means that the door maintains the high sound and fire gas seal over time. Our selection of tough 38x66 mm wood surrounds also gives strong screwed joints for mounting hinges and door closers for example, which contributes to a longer service life.

**Material:** Core is solid chipboard with surrounding wood frame.

**Surface treatment:** Laminate doors are clad with 4 mm wood fibre sheet with a surface coating of 0.7 mm thickness laminate sheet from our standard range. Ready painted doors are clad in 5 mm wood fibre sheet and supplied in white as stand-ard. Veneered doors are clad in 4 mm wood fibre sheet with a surface coating of 0.6 mm knife cut veneer of sorted A-quality, available in oak, beech or birch. Other laminate surfaces or NCS colours are available on request.

## EDGING

---

**Laminate doors:** Supplied as standard with protective edging of 3 mm beech patterned ABS-plastic on four sides. Alternatively, the doors are supplied with ABS-edging in other designs and colours or with solid wood edging.

**Painted doors:** Supplied with painted protective melamine edging on all edges.

**Veneered doors:** Supplied with veneered edging on all four edges in the same type of wood as the surface of the door leaf.

## FRAME

---

**Design:** White painted pine frame 45x92 mm but available to order in frame dimensions 45x68, 45x98, 45x118, 45x122 and 45x145 mm or frame with choice of frame depths 68-250 mm.

**Other:** Other types of wood, NCS colours and surface treatments are available on request. Where a steel frame is required the door is supplied with Daloc steel frame type 01, 02 or 04-09.

## THRESHOLD

---

The frame is supplied with type H threshold bar but is available to order with type G or type K threshold bar and drop strip\*. It is also available with a type B threshold plate or a plastic threshold, but to fulfil the rating requirement the door leaf must then be fitted with a drop strip\*\*.

\*single leaf door, \*\*36dB

## STANDARD FITTINGS

---

Lock case Assa 310, A=48 mm, B=23 mm from opening face to centre of lock case. Galvanized fixed pin hinges and adjustable striking plate and seal in the frame.

## OPTIONAL COMPONENTS

---

Can be supplied with Daloc Linea pattern, factory fitted frame sleeves, vision panel, steel frame, steel threshold, kick plate, frame protection, finger-crush protection etc.

## DOUBLE LEAF DOORS




---

The door leaves and frame are manufactured in the same way as the single leaf door. The active leaf is fitted with an external astragal mounted on the opening face. It also has an astragal strip on the rabbet side of the passive leaf. The passive leaf is fitted as standard with two recessed flush bolts of the lever arm type.

*We reserve the right to make modifications to the designs.*

**DETAIL SKETCHES**

---

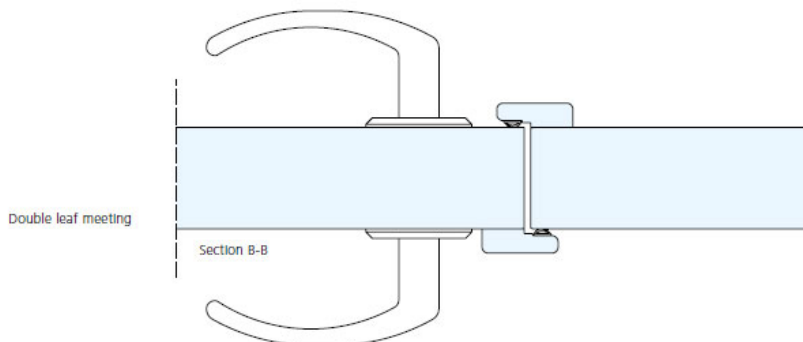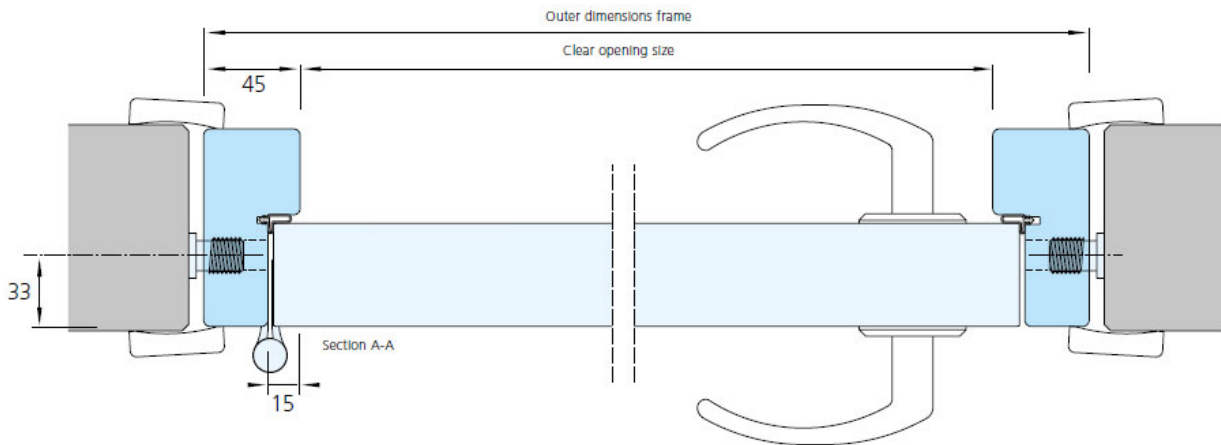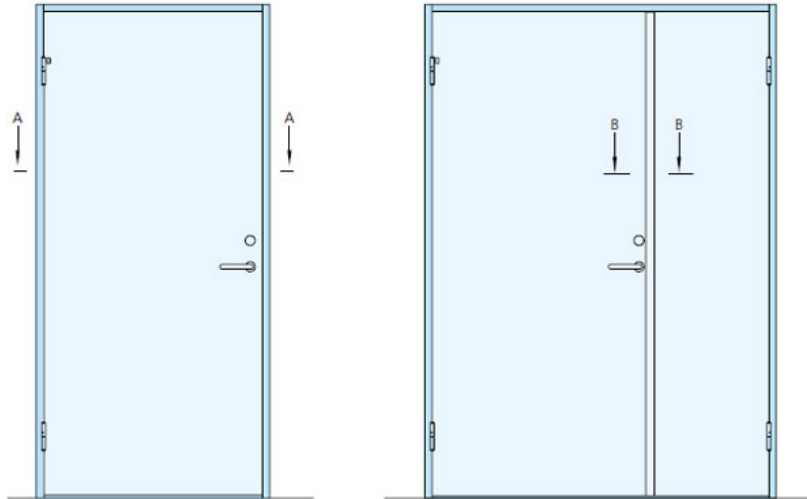

**PICTURES**

---



Hardwood threshold.



Striking plate for Assa 310 lock case.

