

## Daloc T34/65 Solid door



Daloc T34/65 with its high sound reduction can be used in conference facilities and hotels. Wood doors in the Daloc range are equipped with protective edging around the whole door leaf, which both protects and makes it easier to keep clean.

Reference	Clear opening dimensions	Outer dimensions frame	Weight
<b>Single door</b>			
T34 7 x 21	600 x 2025	690 x 2093	55
T34 8 x 21	700 x 2025	790 x 2093	62
T34 9 x 21	800 x 2025	890 x 2093	69
T34 10 x 21	900 x 2025	990 x 2093	76
T34 11 x 21	1000 x 2025	1090 x 2093	83
T34 12 x 21	1100 x 2025	1190 x 2093	90
T34 13 x 21	1200 x 2025	1290 x 2093	97

Other module sizes and special sizes are available on request.

\*At 90 degree opening door loss 63 mm (wood frame), 51 mm (steel frame) from the clear opening.

Single door:  
Fire rating: 12x22.  
Fire gas seal, sound: 13x25

### CLASSIFICATIONS

The door type is tested by RISE Research Institutes of Sweden AB and certified by RISE Certifiering. It is manufactured under the control of RISE.

**Fire rating:** EI30.

**Sound reduction:** Rw 43 dB.

**Fire gas seal:** Option EN 13501-2 class S<sub>a</sub> och S<sub>200</sub>.

### DOOR LEAF

**Design:** The door leaf is 64 mm thick and has a solid chipboard core with a tough wood surround. The design makes the door leaf durable and rigid as well as creating a pleasant, damped closing sound. The rigidity also means that the door maintains the high sound and fire gas seal over time. Our selection of tough 54x66 mm wood surrounds also gives strong screwed joints for mounting hinges and door closers for example, which contributes to a longer service life.

**Material:** Core is solid chipboard with surrounding wood frame.

**Surface treatment:** Laminate doors are clad with 4 mm wood fibre sheet with a surface coating of 0.7 mm thickness laminate sheet from our standard range. Ready painted doors are clad in 5 mm wood fibre sheet and supplied in white as standard. Veneered doors are clad in 4 mm wood fibre sheet with a surface coating of 0.6 mm knife cut veneer of sorted A-quality, available in oak, beech or birch. Other laminate surfaces or NCS colours are available on request

### EDGING

**Laminate doors:** Supplied as standard with protective edging of 3 mm beech patterned ABS-plastic on four sides. Alternatively, the doors are supplied with ABS-edging in other designs and colours or with solid wood edging.

**Painted doors:** Supplied with painted protective melamine edging on all edges.

**Veneered doors:** Supplied with veneered edging on all four edges in the same type of wood as the surface of the door leaf.



## FRAME

---

**Design:** White painted pine frame 45x92 mm but available to order in frame dimensions 45x68, 45x98, 45x118, 45x122 and 45x145 mm or frame with choice of frame depths 68-250 mm.

**Other:** Other types of wood, NCS colours and surface treatments are available on request. Where a steel frame is required the door is supplied with Daloc steel frame type 01, 02 or 04-09. Not S<sub>200</sub> with steel frame.

## THRESHOLD

---

The door is supplied with type H threshold bar but is available to order with type G or K threshold bar or with a plastic threshold with twin drop strips. It is also available with drop seal threshold (Drop seal threshold sound rating Rw 38dB).

## STANDARD FITTINGS

---

Lock case Assa 310, A=64 mm, B=23 mm from opening face to centre of lock case. Galvanized fixed pin hinges and adjustable striking plate. The door is fitted with a seal. A/B measurements apply only to Assa Connect and Assa Module locks, as regards to other locks please contact Daloc.

## OPTIONAL COMPONENTS



---

Can be supplied with Daloc Linea pattern, factory fitted frame sleeves, steel frame, steel threshold, kick plate, crush protection etc.

*We reserve the right to make modifications to the designs.*

**DETAIL SKETCHES**

---

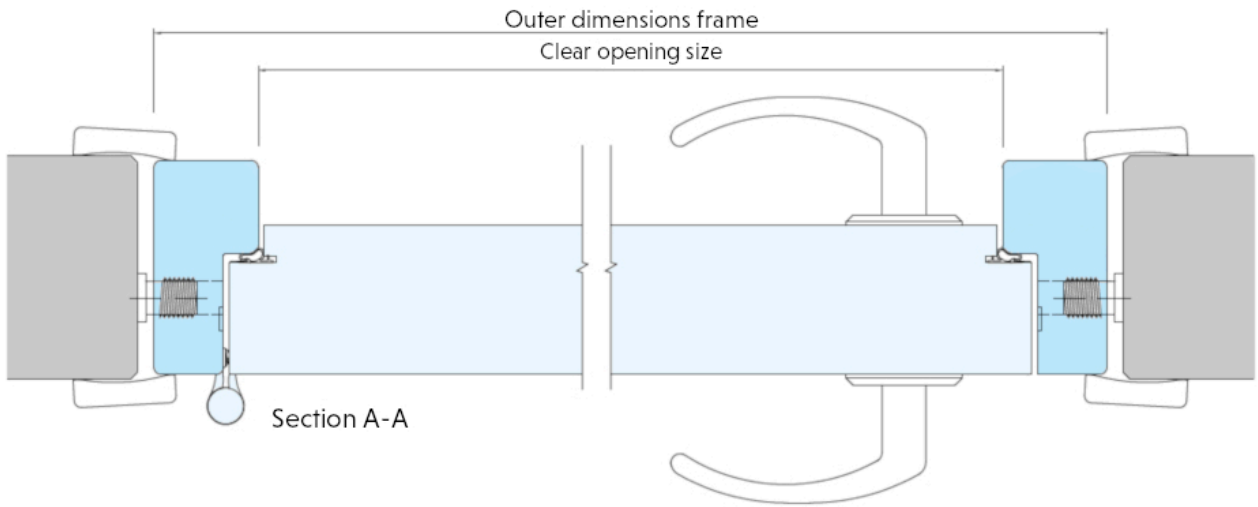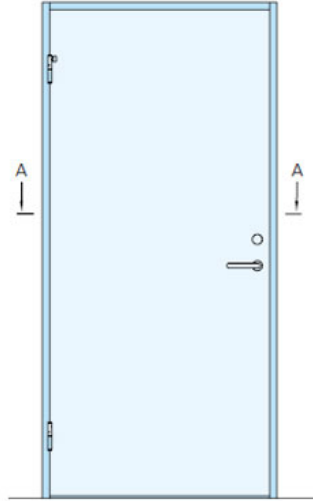

**PICTURES**

---



Protective edging around the whole door leaf that both protects and makes it easier to keep clean.



Hardwood threshold.



Striking plate for Assa 310 lock case.